


TIG (high frequency (HF) or LIFT striking) and MMA inverter welding machine in direct current (DC). Use with a wide range of materials such as steel, stainless steel, titanium, copper, nickel and their alloys. Characteristics: TIG regulations: post gas, current down slope, bi-level * MMA regulations: arc force and hot start according to the type of electrode in use * 2/4 strokes operation * anti-stick device * remote control connector * MMA electrodes: rutile, basic, stainless steel and cast iron * thermostatic, overcurrent, overvoltage, phase failure protections. The optional TIG PULSE allows pulse welding. Complete with TIG welding accessories.



INDUSTRIAL

PROFESSIONAL

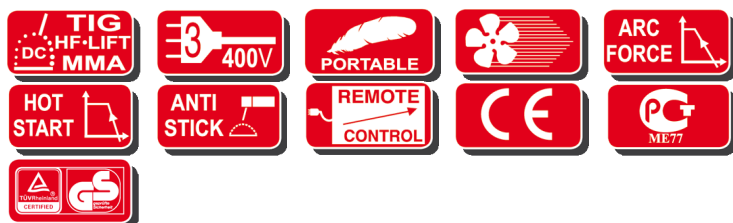

Norms:	LVD: EN 60974-1	LVD: EN 50445	EMC: EN 60974-10						
CODE	V _{ph} V 50/60Hz	A _{MIN} A	A _{MAX} A 40°C A EN60974-1	A _{60%} A 40°C A EN60974-1	V _o V	A _{60%} A A _{MAX}	A _{MAX} A	P _{60%} MAX W	η n%
816100	400 3 ph	7 280 DC	280 35 % DC	180 DC	100 DC	11 16	16	5 7,5	85
cosφ	Ø _E MIN mm	IP	W _H cm(L,W,H)	kg	BAR CODE				
0,7	1,6 5	IP 23	47,5 17 34	20	8004897837 12 3				